

4.5V-60V Vin, 3.5A, High Efficiency Step-down DCDC Converter with Programmable Frequency

FEATURES

DESCRIPTION

APPLICATIONS

REVISION HISTORY


DEVICE ORDER INFORMATION

1)		

ABSOLUTE MAXIMUM RATINGS

- (1)
(2)


PIN CONFIGURATION

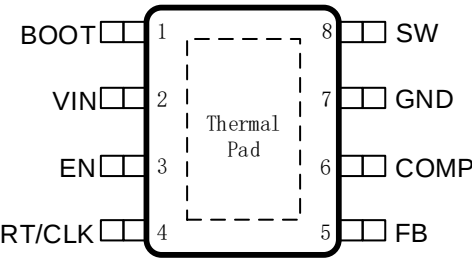



PIN FUNCTIONS

TYPICAL CHARACTERISTICS

FUNCTIONAL BLOCK DIAGRAM

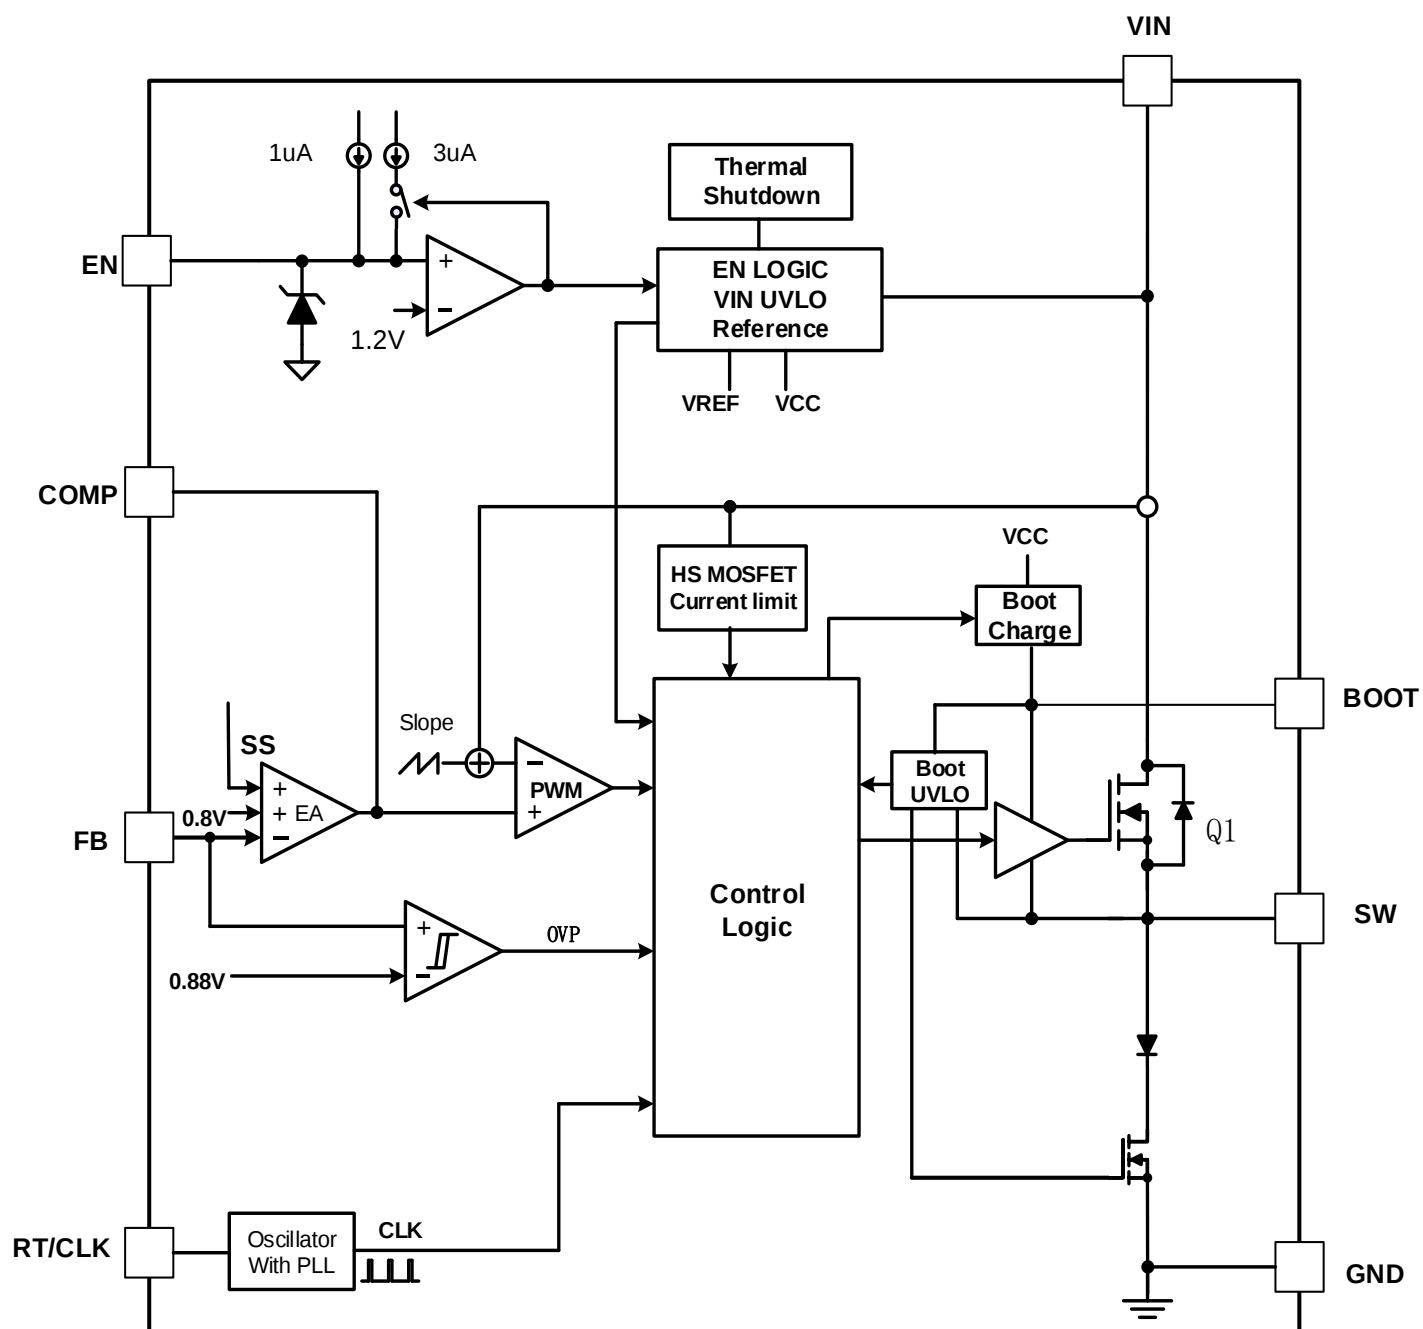

OPERATION

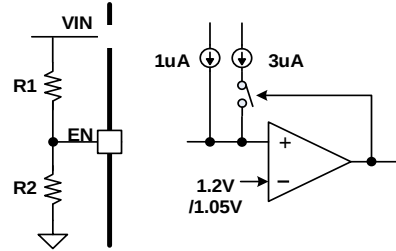

1% tolerance


—

•aZHG WR


+] 7KH







—







APPLICATION INFORMATION

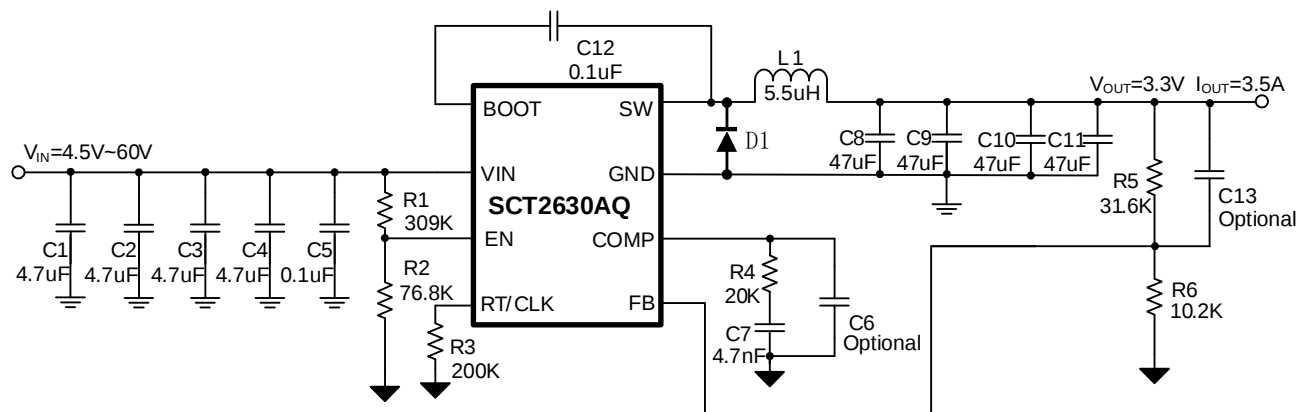

—
————
—

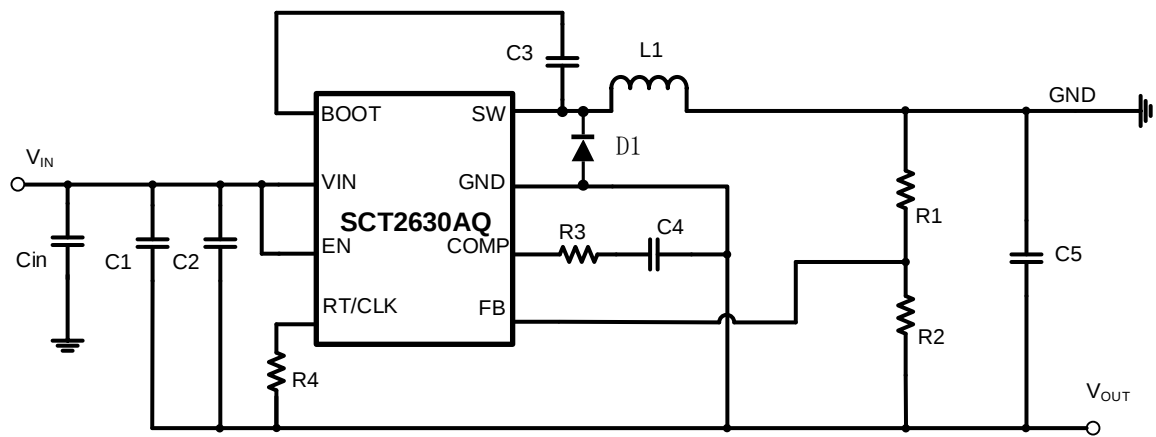

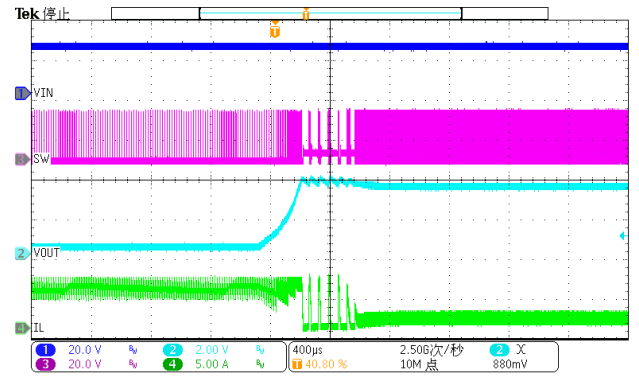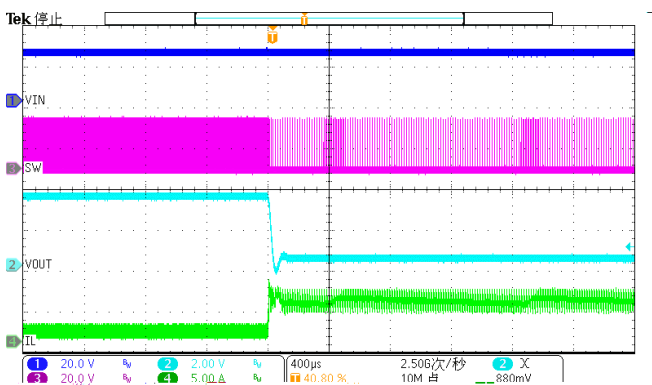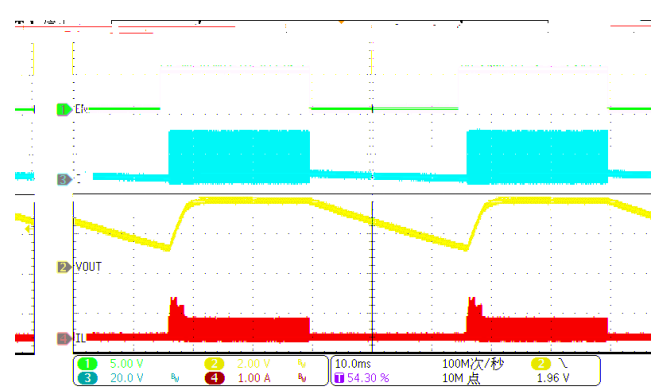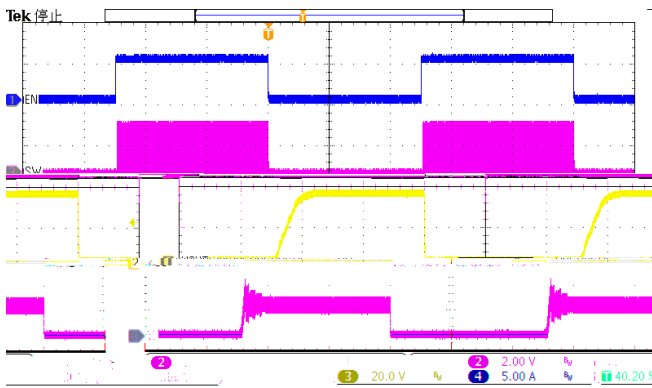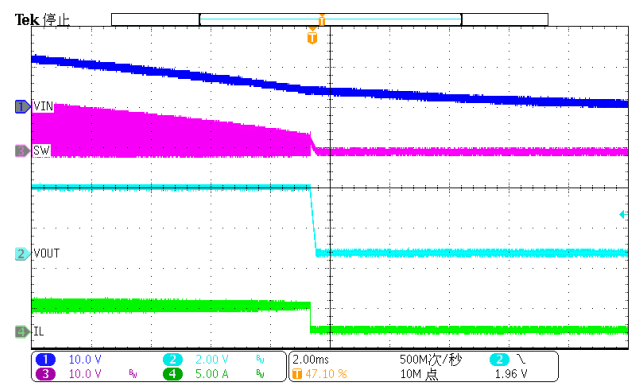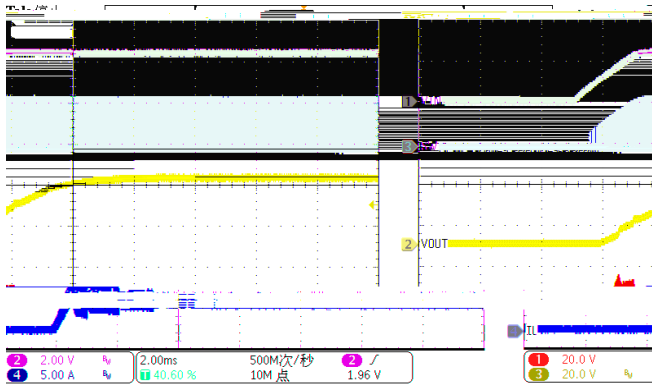

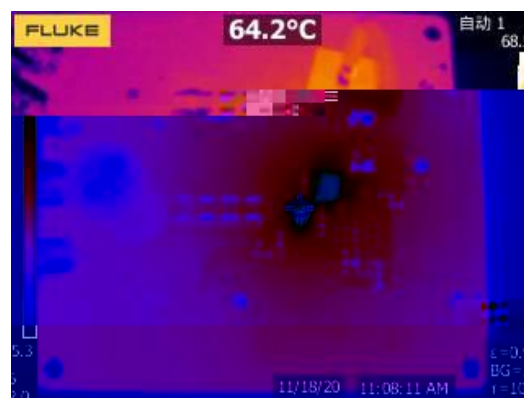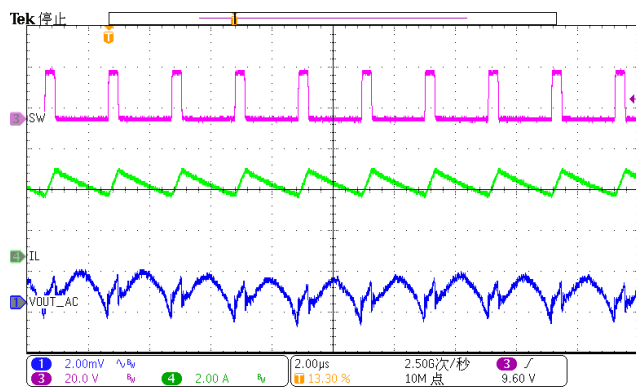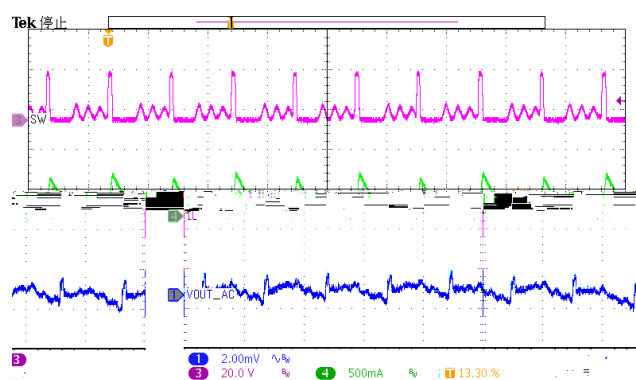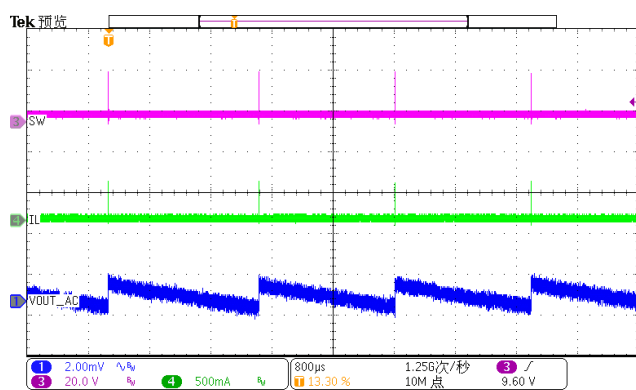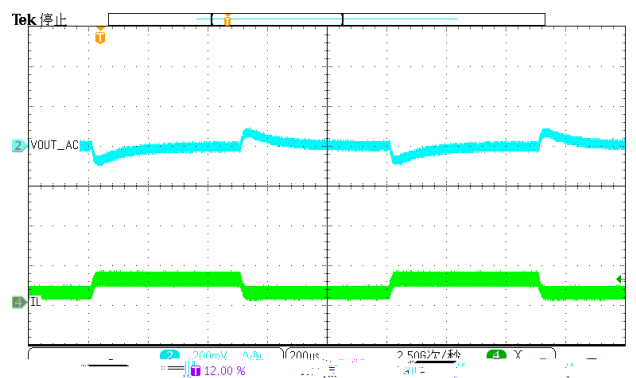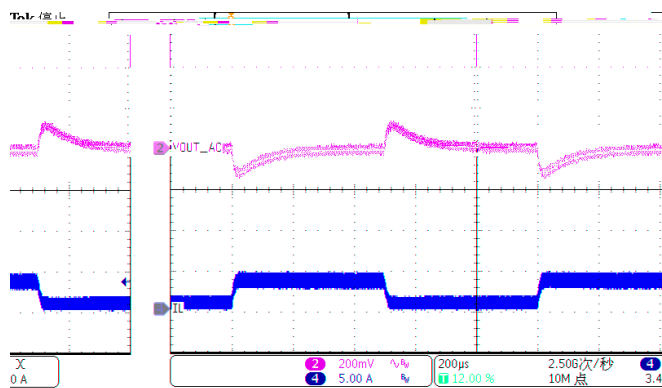

- 1.
- 2.
- 3.
- 4.
- 5.
- 6.
- 7.
- 8.
- 9.
- 10.

